




## Metallic Effect 400 ml APR3 (S400MET)

**METALLIZED AND CHROMED FINISHES** - It is a metallic and chromed enamel characterized by a particular brightness that made it similar to a mirror and/or enriches and makes shiny surfaces and objects such as friezes, frames, cups, medals, Christmas decorations, and more. It does not resist to abrasions. When applied, it should not be exposed to the outside, handled or over painted.

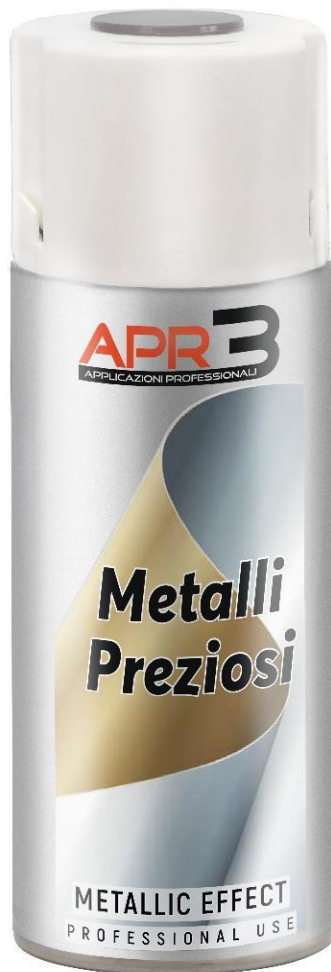

### Technical Specifications:

Quantity	400 ml
Box / Case	6 Pz.
Aspect	Tin-Plate can containing under pressure fluid
Chemical nature	Quick drying acrylic paint
Colour	Gold – Silver – Copper – Bronze
Odour	Characteristic of solvent
Relative density	At 20°C 0,71 ÷ 0,75 g/ml
Flash point	Und. 0° C extremely flammable
Writing on bottom can	Barcode, batch date, product name
Pressure	at 20°C 5,5 ± 0,5 bar
Pressure	at 50°C 8,0 ± 0,5 bar
Viscosity Ford cup	From 10" to 13"
Dry residual in spray	From 12% to 18%
Granulometry grindometer	Bottom Scale 0 a 2 Micron
Gloss	From 7 to 95 Gloss (Glossmeter angle 60°)
Thickness 1 coat	about 13 Micron
Thickness 3 coats	about 36 Micron
Resistance temperature	-10°C / +150°C (Peak 200° C)
Drying time t=20°:	Out dust 10 minutes
	Dry to touch 15-30 minutes
	Dry in depth 24 hours
Security cap child-proof patented and registered	
Token with color reference	

**Product subject to the VOC Directive**  
Subcategory: Special Finishes  
VOC Limit Value: 840 g/litre

#### APPLICATION FIELDS:



Metal surfaces such as iron, aluminium, steel, glass and plastics.  
Apply at room temperature:  
Min. 10°C - Max. 35°C

### HOW TO USE:

- Vigorously shake the can for at least 1 minute, until you hear the inner marbles move freely. It is also suggested to occasionally shake the cylinder even during use;
- Carefully clean the surface before application;
- Test in a hidden area to verify compatibility of the surface with the paint.



Remove the secure seal on the cap, to open the spray

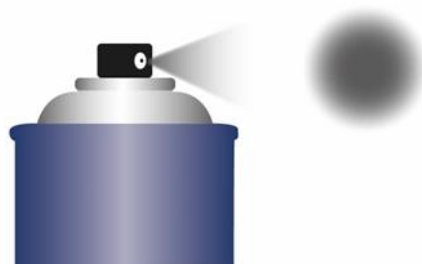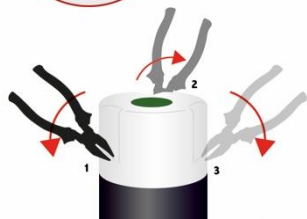

- **Erogazione: Lineare**  
Dispensing: Linear
- **Quantità prodotto erogato: Media**  
Quantity product dispensed: Medium
- **Tipo di erogazione: Cono medio**  
Dispensing type: Medium cone
- **Tipo di spruzzo: Nebulizzato**  
Spray type: Nebulized

### SPRAY:

- Apply a first hand / coat light to improve coverage and adherence, to reduce the possibility of dropping. Apply from a distance of 20-30 cm;
- After a few moments apply a second horizontal hand/coat immediately followed by a third vertical hand / coat;
- Let dry a few minutes;
- After use, it's advisable to spray for 2/3 seconds with the spray upside down, to avoid the block of the actuator;
- After 24h, proceed with the normal use of painted piece.

### MODALITY OF STORAGE

Before using: stock the product in a dry location and don't stock it with a temperature under 5°C and over 45°C, after the use, keep containers closed. In the original package, the product can be conserved for 24 months (warranty). The product doesn't expire.

After the first usage: conserve in a fresh and dry location, away from hot spring. Keep out of reach of children.

This information, even if reliable, must be considered only approximate. We are not responsible for the wrong use of the product, or the violation of any license. Before using, the users should verify the suitability of the product for its specific use.

**BEFORE USE, CONSULT THE SAFETY DATA SHEET OF THE PRODUCT**